

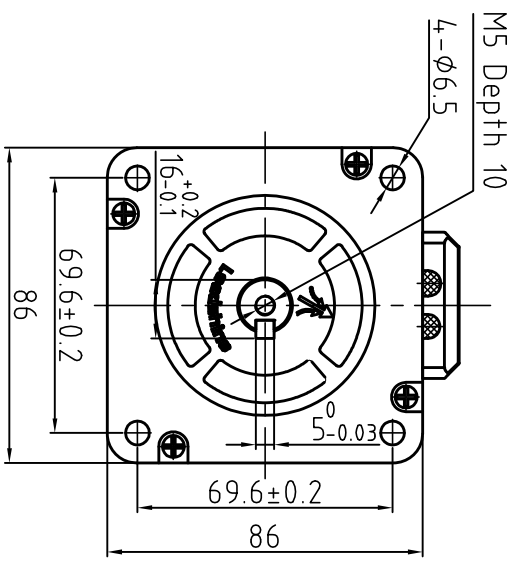


Dimension: (Unit: mm)

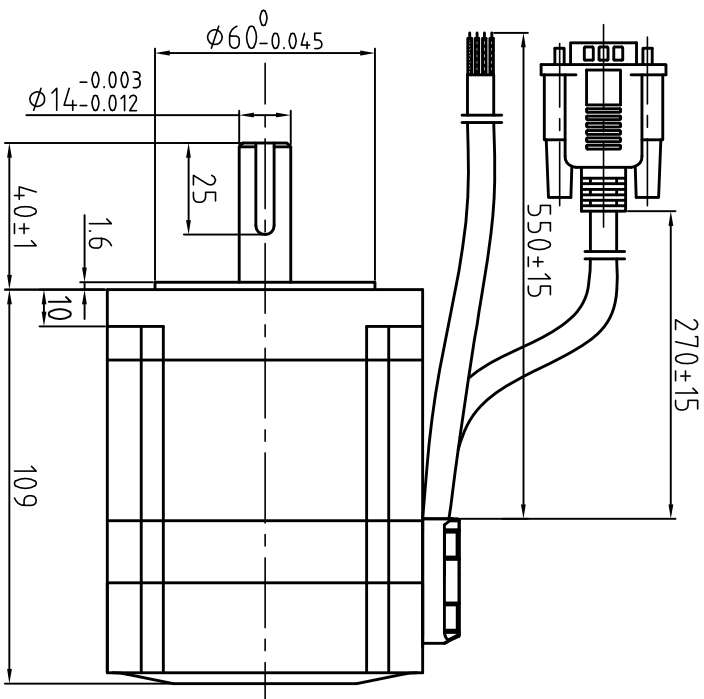


版本 Rev:	日期 Date:	变更文件号 ECU NO.:	变更内容 Revisions:	设计 By:
V1.0	17.05.18		曹LOGO, 魏林斌	王洪松

Motor Connections



Encoder Signals



颜色	1	2	3	11	12	13
定义	A+	VCC	GND	B+	B-	A-

Common Rating

Step angle	18°
Position accuracy	18±0.09°
Dielectric strength	1000VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(Load 450g)
Axial play	Max:0.08mm(Load 900g)

Specification

Current/phase	6.0 A
Voltage	2.8 V
DC Resistance/phase ±10%	0.6 Ω
Inductance/phase ±20%	3.97 mH
Holding torque	4.6 N·M
Inertia	1.95 kg·cm²
Weight	2.7 kg
Encoder Resolution	1000 cpr

设计 Designed	王洪松	日期 Date	2017.05.18	材料 Material	
审核 Checked	秦军	第一角画法 First Angle projection		比例 Scale	
批准 Approved	田天胜	2017.05.18		比例 Scale	
图号 Part No.		共 1 套 第 1 套	Sheet 1 of 1	图号 DWG. NO.	LS-CM86-02-0010-01
深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.		混合伺服电机 86CME4.5			