


Dimension: (Unit: mm)

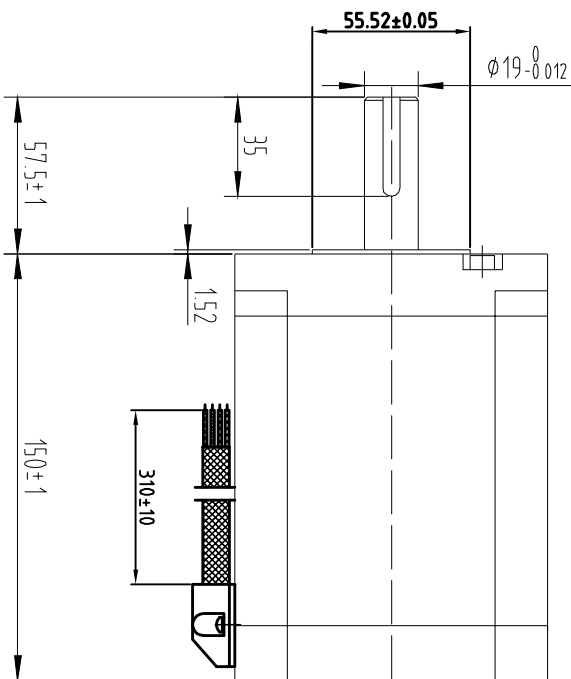

版本 Rev:	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	17.5.19		新版	王洪松
V2.0	19.7.1		增加压线块	王洪松


**Common Rating**

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

**Specification**

Current/phase	6.5 A
Voltage	3.6V
DC Resistance/phase	0.72 Ω
Inductance/phase	13 mH
Holding torque	20 N·M
Inertia	10.9kg·cm <sup>2</sup>
Weight	8.4 kg

**Motor Connections**

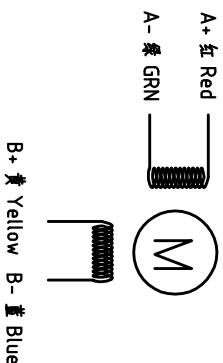

设计 Designed	王洪松	日期 Date	19.7.1	材料 Material				设计 Title	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	袁继强		19.7.1	第一角画法 First Angle projection				混合式步进马达	
批准 Approved	袁继强		19.7.1	重量 Weight	比例 Scale	图例 Legend	图例 Legend	110CM20 MS20	
零件号 Part No.	LS-MT-01-07A		共 1 页 第 1 页	Sheet 1 of 1				图号 DWG. NO.	LS-110CM20 MS20