
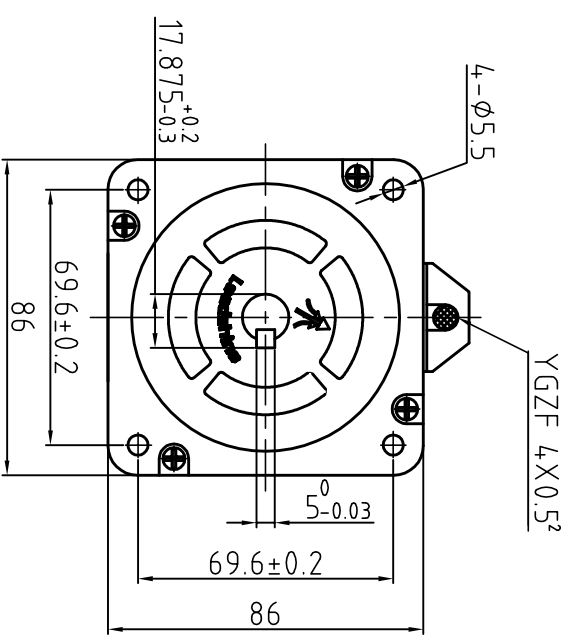
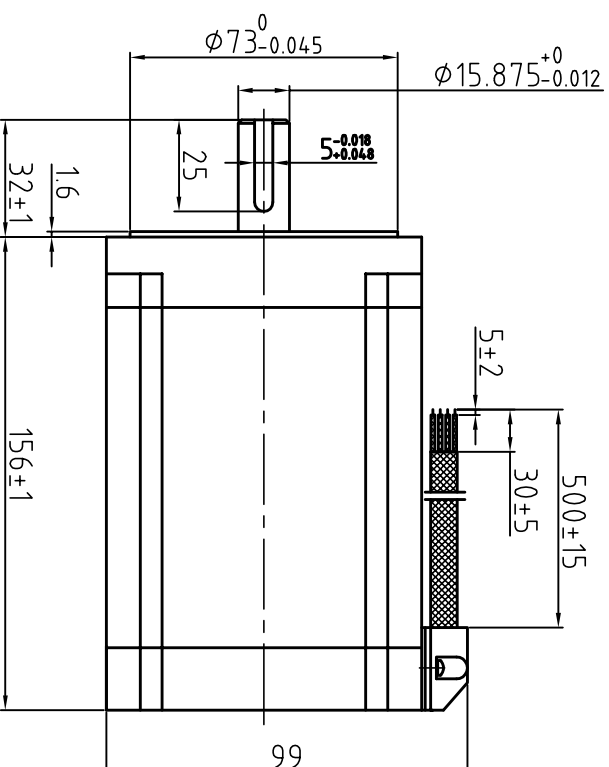


版本 Rev.	日期 Date	变更文件号 EEN NO.	变更内容 Revisions	设计 By
V1.0	18.10.30		带LOGO	王洪林

Dimension: (Unit: mm)

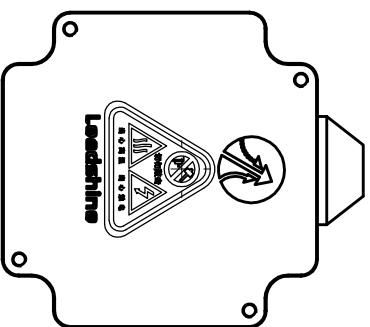

Common Rating

Step angle	1.8°
Position accuracy	18±0.09°
Dielectric strength	1000VAC 1min
Insulation resistance	100MΩmin(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

Specification

Current/phase	6,0 A
Voltage	3,9 V
DC Resistance/phase	0,65 Ω $\pm 10\%$
Inductance/phase	6,8 mH $\pm 20\%$
Holding torque	12 N • M
Inertia	4,0 kg • cm ²
Weight	4,45 kg

Motor Connections

A+ 黒 Black

A- 紅 Red



B+ 黄 Yellow B- 蓝 Blue

设计	王瑞如	日期	18.10.30	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.				
Desigined		Date			名称 Title				
审核	黄桂建	18.10.30		第一角画法 First Angle projection		混合式步进马达			
Checked				版本/版次 Version/Issue	比例 Scale	图章标志 Stage Mark			
批准	黄桂建	18.10.30		A/01					86CM125
Approved									
零件图 Part No.	LS-MT-01-07A				共 1 套 第 1 套 Sheet 1 of 1	图号 DWG. NO. LS-86CM125			