




版本 Rev.	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By

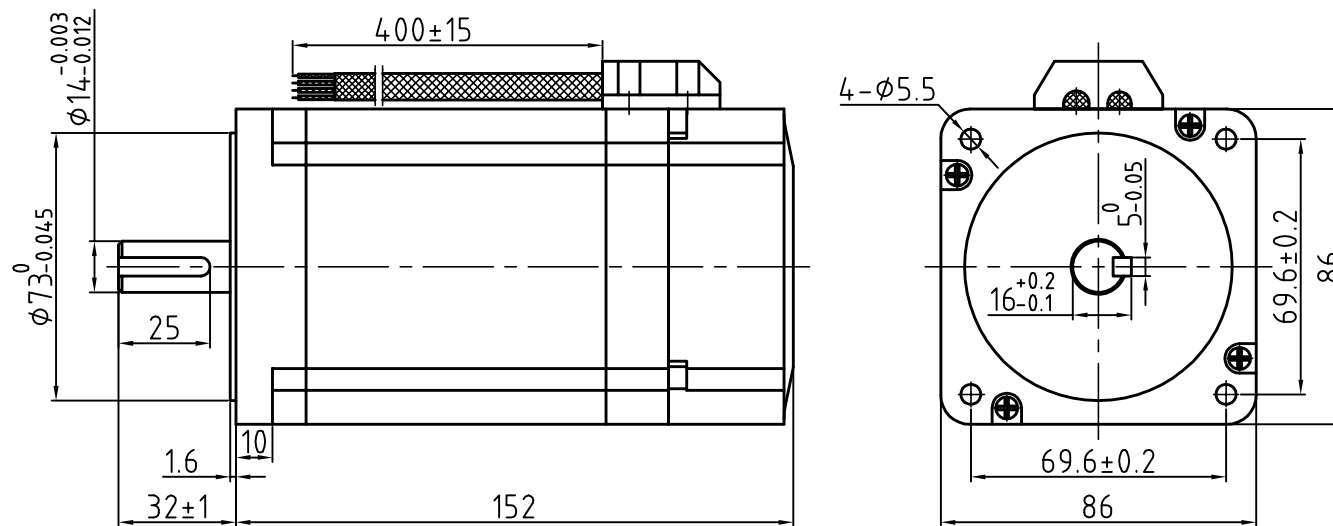

Motor Connctions

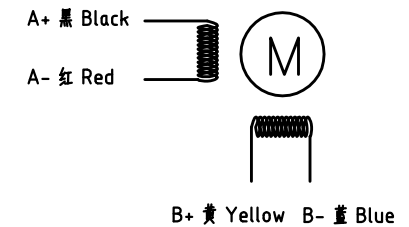

Brake Connctions



Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	1000VAC 1min
Insulation resistance	100MΩm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Specification

Current/phase	6.0 A
Voltage	3.2 V
DC Resistance/phase ±10%	0.53 Ω
Inductance/phase ±20%	3.9 mH
Holding torque	8 N·M
Inertia	2.8 kg·cm ²
Weight	3.8 kg

Brake Specification

Voltage	24Vdc
Friction torque	4N·M

设计 Designed	王源松	日期 Date	17.11.8	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	黄维立	17.11.8	第一角画法 First Angle projection	混合式步进电机	名称 Title
批准 Approved	黄维立	17.11.8	版本/版次 A/01	比例 Scale	86CM85-BZ
图号 Part No.	LS-MT-01-07A	共 1 页 第 1 页 Sheet 1 of 1	图号 DWG. NO.	LS-86CM85-BZ	